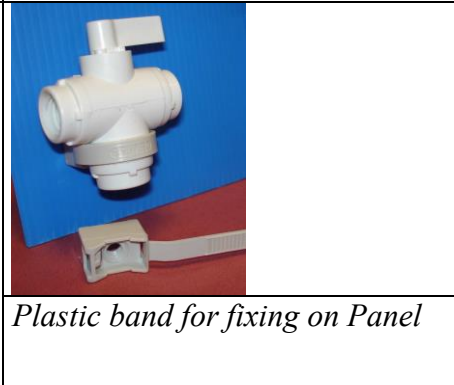



COMPOTECH SRL

	Ball Valves Serie mini Cod. VII 2 or 3 ways threaded ends 1/8 NPT; 1/4NPT (std) • Materials: PP ; PVC; Nylon; PVDF black • Seals: Buna-N; Ethyl. Prop.(EPDM); Viton • Operation: Max.Presss.9 Bar; Max Temp.60 C°		
 <i>Cod</i> VIIIPP0104N04NB	BALL VALVE PP white 1/4 NPT fe. (Viton O-Ring) • Max Press.: 9 Bar • Max.Temp.: 60 C° • Ball hole diam.: 7 mm Sizes: H= 40mm L=45mm	 Dim. H= 40mm L=45mm VIIKY0104N04NN	BALL VALVE PVDF black 1/4 NPT fe (Viton O-Ring) • Max Press.: 9 Bar • Max.Temp.: 60 C° • Ball hole diam.: 7mm
 Size.: H= 40mm L=65mm	BALL VALVE PVC gray Quick conn. type J-Guest tubing 1/ 4" or (6mm) OD Seals:Buna/EPDM/Viton Ball hole diam.: 7 mm <i>Cod</i> VIIVC0104R04RG		PLUG VALVE 90° PVC 1/4NPT fe *1/4 OD or 6mm Quick conn type J-Guest Seal: EPDM *Max Press: 10 Bar *Max Temp: 70 C° * Ball hole diam.: 5mm <i>Cod</i> VI4VC04N04RB
 VIIVC0304N04NB	3Ways Ball Valves (Inlet Center / Out left-right) PVC white or PP (option) * <u>Ends 1/4 NPT fem</u> *Seals: Viton or EPDM (option) • Max. Press.: 9 Bar • Max.Temp.: 60 C° • Ball hole diam.: 7mm • Sizes: H= 60mm L=50mm		 <i>Plastic band for fixing on Panel</i>
 VIIKY0304N04NV	3Ways Ball Valves (Inlet Center / Out left-right) PVC white or PP (option) * <u>Ends 1/4 NPT fem</u> *Seals: Viton or EPDM (option) • Max. Press.: 9 Bar • Max.Temp.: 60 C° • Ball hole diam.: 7mm • Sizes: H= 60mm L=50mm		<i>Other ends available on request</i> 

Ball Valves Serie medium Cod. VI2 / VI3 2 or 3 ways threaded ends *1/4 *1/2 *3/4 NPT Fem		 	
Materials: PP ; PVC; Nylon; PVDF black Seals: Buna-N; Ethyl. Prop.(EPDM); Viton Operation: Max.Presss.9 Bar; Max Temp.60 C°		  	
	BALL VALVE PVC white Ends 1/4 NPT fe Seals EPDM (option Viton) *Max Press: 9 Bar *Max Temp.:60 C° L= 60mm D= 25mm Ball hole diam.: 11mm <i>Cod VI2VC0104N04N</i>		BALL VALVE PP white Ends 1/2 NPT fe Seals Viton *Max Press: 9 Bar *Max Temp.:60 C° Ball hole diam.: 11mm L=85 mm Ex.:27 mm Body Diam: 26mm <i>Cod VI2PP0108N08NV</i>
	BALL VALVE PVC gray Ends 3/4 NPT male x fem Seals <u>Buna(std)</u> *Max Press: 9 Bar *Max Temp.:60 C° Ball hole diam.: 12mm L: 60 mm Ex: 32 mm <i>Cod VI3VC0112N12NM</i>		BALL VALVE PVC gray Ends 1/2 NPT male x fem Seals <u>EPDM(std)</u> *Max Press: 9 Bar *Max Temp.:60 C° Ball hole diam.: 11mm L: 60 mm Diam: 30 mm <i>Cod VI3VC0108N08NM</i>
	2 Ways Ball Valve black PVDF Ends: 1/2 NPT Fem. - Max.Press.: 9 Bar - Max.Temp.: 60 C° - Ball through hole: <u>11mm</u> Viton seals Sizes: Ex. 27mm L= 85mm <i>VI2KY0108N08NV</i>		3Ways Ball Valves (Inlet Center / Out left-right) PP white * <u>Ends 1/2 NPT fem</u> *Seals: EPDM (Viton option) - Max. Press.: 9 Bar - Max.Temp.: 60 C° - Ball hole diam.: 11 mm - L= 70mm H=80mm Cod VI3PP0308N08NB
	NEEDLE VALVE Polyprop. 1/4NPT Fem ends *Stem seal PTFE *Fine regulation cone 2,5° *Operation: Press:9 Bar Temp:60 C° Min flow dia.:4,5 mm Sizes H= 67mm L=50mm Nut for Panel mount (hole 22mm) <i>VR1PP0104N04NB</i>		NEEDLE VALVE PVDF(Kynar) 1/4NPT Fem ends *Stem seal PTFE *Fine regulation cone 2,5° *Operation: Press.9 Bar Temp:60 C° Min flow dia.:4,5 mm Sizes H= 67mm L=50mm Nut for Panel mount (hole 22mm) <i>VR1KY0104G0</i>

 VI3VC0304N04NB (1/4NPT ends) VI3VC0308N08NB (1/2NPT ends)	3 Ways Ball Valve Gray PVC (Inlet down / Outlets left or right ends) • Ends: 1/4NPT fem or 1/2NPT fem ends • <u>Seals:</u> Buna • Max Pressure: 9 Bar • Max. Temp. 60 C° • Ball through hole diameter: 11 mm Sizes: H= 80mm L= 70mm	 VR1VC0104R04RB	REGULATING NEEDLE VALVE <u>Body material:</u> PVC-gray <u>Ends:</u> Push-to-Connect for 1/4 OD tubing <u>Seals:</u> PTFE (Teflon) Panel mount (22 mm hole) with black ex. Regulating Cone: 2,5° H= 67mm Lenght: 72 mm
 	REGULATING NEEDLE VALVE <u>Body material:</u> PVC-white <u>Ends:</u> Push-to-Connect for 3/8 OD tubing <u>Seals:</u> EPDM Needle option: 6 turn 2.5 degree Panel mount (22 mm hole) with black ex. Regulating Cone: 2,5° H= 67mm Lenght: 70 mm	VR1VC06R06RE	