
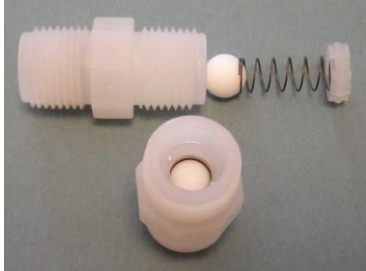
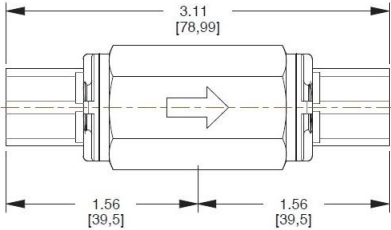
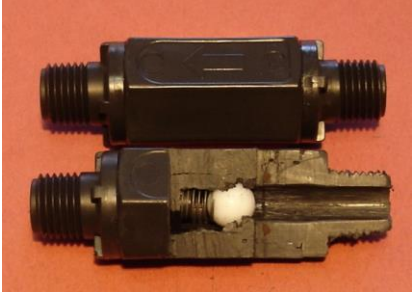
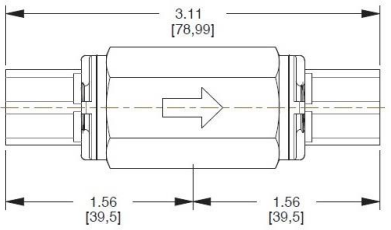



Check Valves		
Disc check valves		
	DISC CHECK VALVE Polyprop.-white 1/4 NPT-Fe ends • Disc with seat suitable for O-ring • SS Spring (or Hastelloy option) • O-Ring in Viton (or Kalrez with extra price) • Wide flow section for higher flowrates. • Works in any position, also without spring *Cracking Press: 0,03 Bar *Max Press: 9 Bar *Max Temp: 60 C°	
	Sizes: L=51 mm Ex=24 mm	Other Sizes: 1 /4 NPT (Ex. 24mm L=51mm) 3 /8 NPT (Ex. 24mm L=51mm) 1 /2 NPT (Ex. 28mm L=63 mm) 3 /4 NPT (Ex. 35mm L=63 mm)
Code VK2PPFE04N04NV		
	White PP Disc Check Valve 1/4 NPT ends Hastelloy Spring (Optional) O-Ring seals: EPDM Press Max: 9 Bar Temp Max: 60 C° Opening Press: 0,03 Bar Sizes: L= 51 mm EX= 24 mm	
VK2PPFE04N04NE VK2PPFE04*HST	VK2PPFE08N08NE1	White PP Disc Check Valve 1/2 NPT ends Hastelloy Spring (Optional) O-Ring seals: EPDM Press Max: 9 Bar Temp Max: 60 C° Opening Press: 0,03 Bar Sizes: L= 63 mm EX= 28 mm
SS Ball check Valves		
	BALL CHECK VALVE PVC 1/4 NPT-Fe ends • Max Press: 9 Bar • Max Temp: 60 C° • SS Spring + Ball • O-Ring: Buna • Cracking Press. : 0,1 Bar Sizes: Length: 55mm Diam: 25 mm	
VK3VCFE04N04NB	VK4PPBR0202B	PP Check Valve barbed ends: *1/8 ID Barbed diam 3x4,4mm *1/4 ID Barbed diam 6,3x8,6mm *SS Spring + Ball *Cracking Press.: 0,07 bar *Max Press: 9 Bar Outer Diam: 13 mm (1/8 or 1/4) Length: 35mm (1/8) 52mm (1/4)

Check Valve Teflon Ball + Hastelloy Spring		
 VK1KMA04NHT	PVDF Check valve Ends: 1/4 NPT male • Teflon ball+ Hastelloy spring. • O-Ring Viton • Cracking Press: 0,2 Bar(std) • Hole bore: 5 mm	 Valve with PvdF Jaco fittings
	> Other available sizes: <u>Ends 3/8NPT</u> L= 38mm Ex= 20,5 mm <u>Hole bore 6mm</u> <u>Ends 1/2NPT</u> L= 45mm Ex= 23 mm <u>Hole bore 9mm</u>	
Diaphragm check Valves		
 VK7PPBR0202V	Polyprop. Diaphr. check. <u>*Zero Cracking Press.</u> Barbed ends for 1/8ID tubing > Barbed Diam: 3mm x4,4mm < *Viton Diaphragm *Max Press9 Bar *Outer Diam: 20 mm *L: 33 mm *Body thikness: 7mm	 VK7KYBR0303V
		PVDF Diaphr. check. <u>*Zero Cracking Press.</u> Barbed ends for 3/16 ID tubing > Barbed Diam: 4,7mm x 6,4mm < *Viton Diaphragm *Max Press9 Bar *Outer Diam: 20 mm *L: 42 mm *Body thikness: 7mm

 VK3KY06MVHT	Black PVDF CHECK VALVE Teflon Ball+Hastelloy Spring+Viton Oring *Ends suitable for 6mm OD tubing *PVDF 6mm OD Nuts *Max Press: 9 Bar *Max Temp: 60 C° * Crack Pressure: 0,14 Bar	Sizes: *Lenght:85 mm *Exag. 22 mm 
 VK3KYMA04NVHT	Black PVDF CHECK VALVE Teflon Ball+Hastelloy Spring+Viton Oring 1/4NPT Male ends *Max Press: 9 Bar *Max Temp: 60 C° * Crack Pressure: 0,14 Bar	Sizes: *Lenght:70 mm *Exag. 22 mm 

	PVC-Gr CHECK VALVE, stainless steel ball and spring. Ethylprop seal JACO connection, 1/4 OD or 6 mm OD L= 80 mm D= 25mm	
VK3VC04J04JG		
	Black PVDF <u>Disc Check Valve</u> + SS Spring 1/4 NPT ends O-Ring seals: Viton Option (4,00 Eur): Hastelloy Spring Press Max: 9 Bar Temp Max: 60 C° Opening Press: 0,03Bar Sizes: L= 51 mm EX= 24 mm	
VK2KYFE04NV		
	Polyprop. Check Valve (Ball type) Barbed ends for 1/4 ID tubing Seal: O-ring Buna (Viton on request) Spring: Stainless Steel Ball: AISI316 Cracking Pressure: 0,07 bar (1.00 PSI) *Max Press.: 9 Bar Overall sizes: *Diam 13mm *L: 52mm *Cyl lenght: 16mm	 > Barbed sizes: B=6,3mm C=8,6mm
VK4PPBR0404B		